

FIG. 2

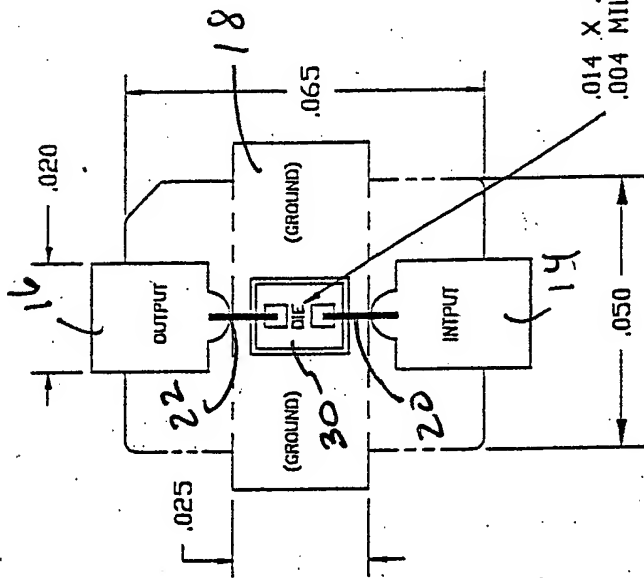


FIG. 3

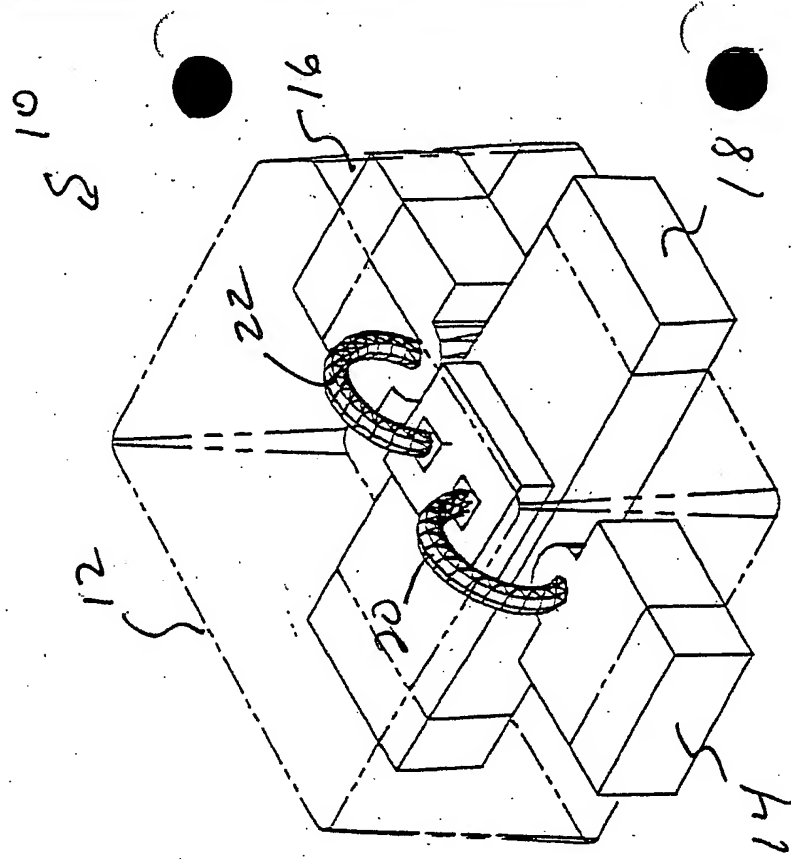
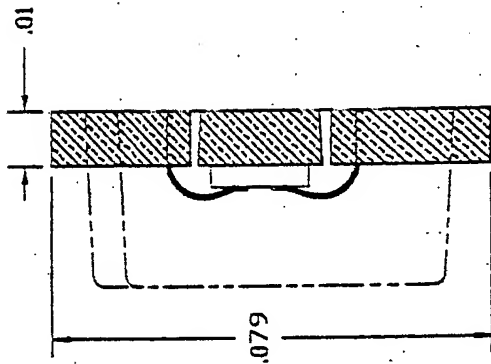


FIG. 1

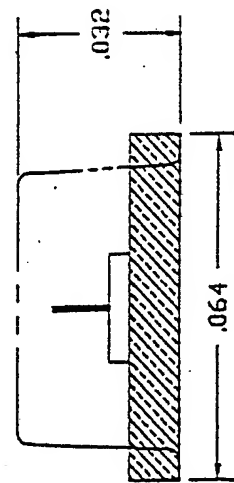


FIG. 4

209330-445991

FIG. 5A

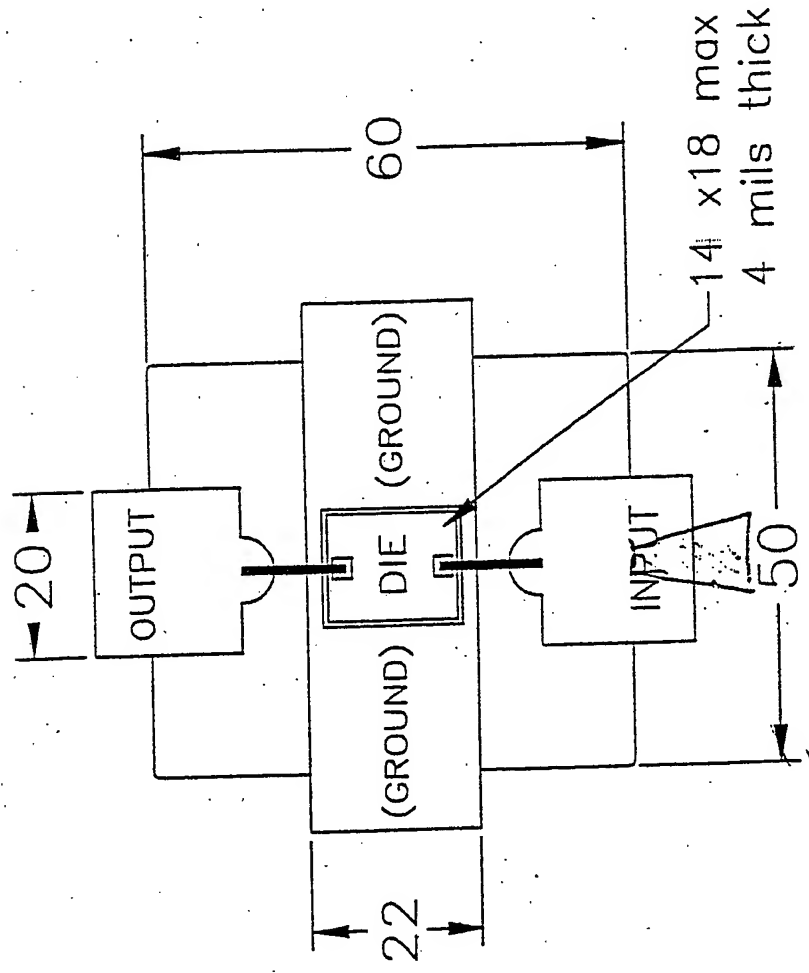


FIG. 5B

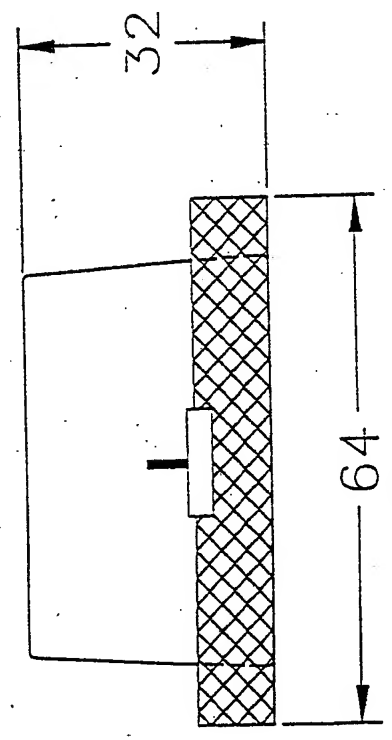
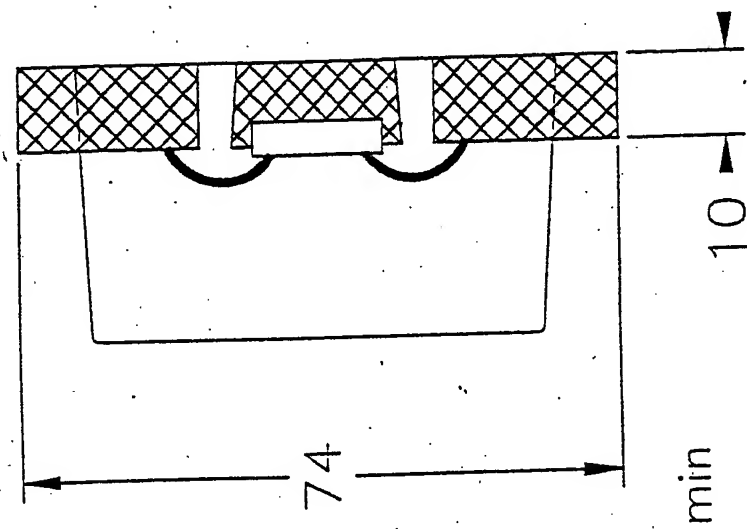
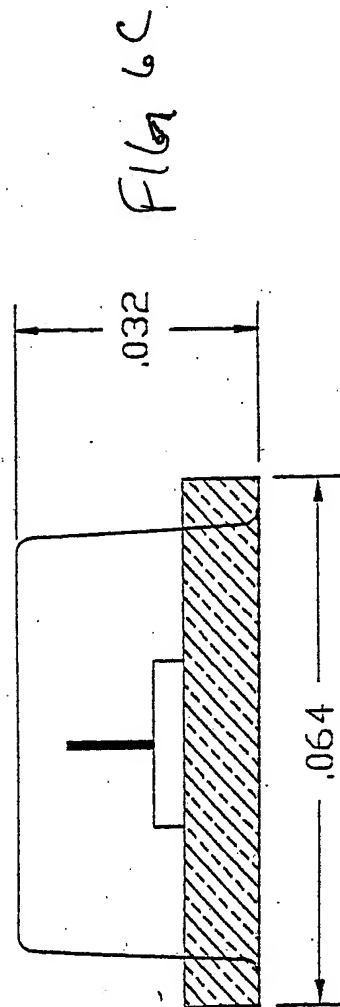
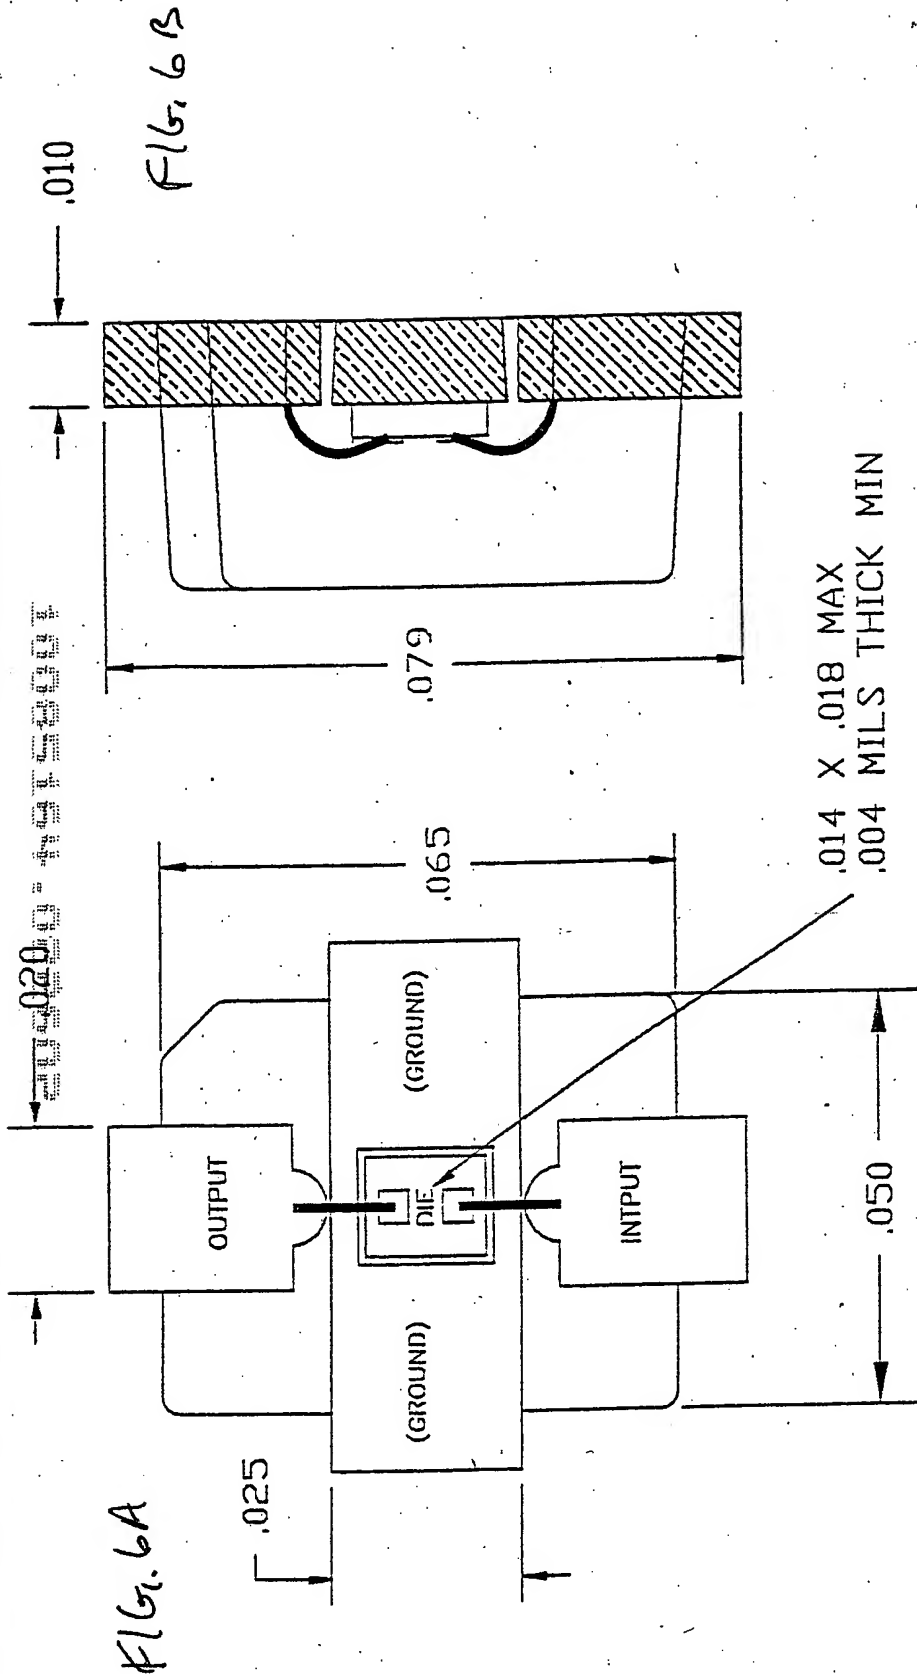


FIG. 5C

Dimensions are mils



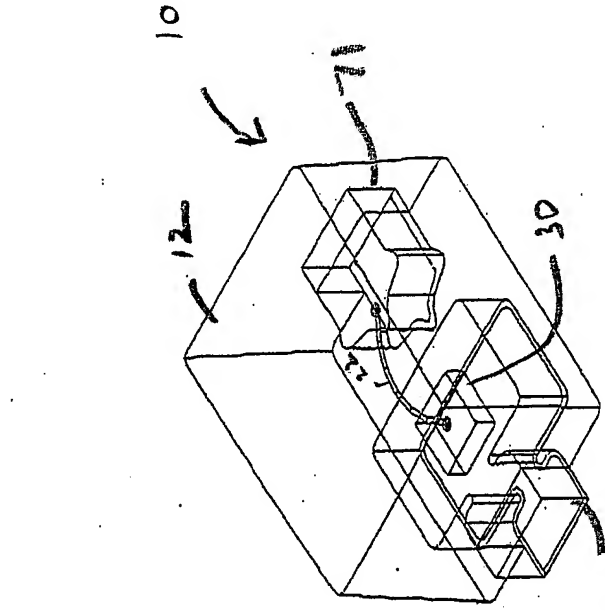


Figure 7A

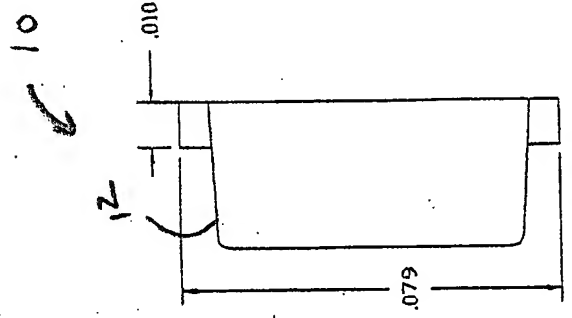


Figure 7C

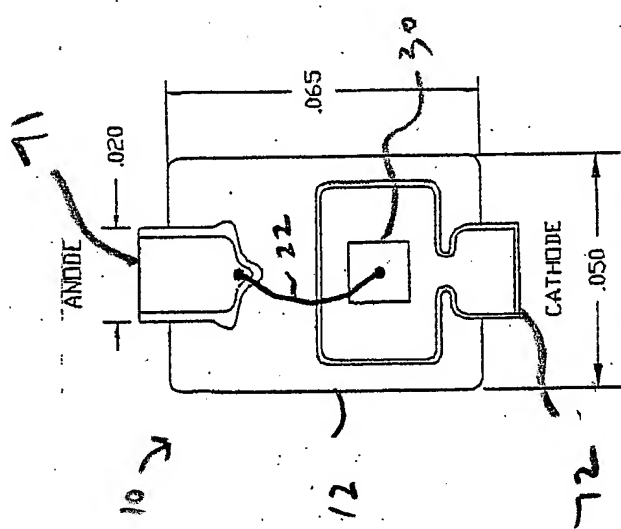


Figure 7B

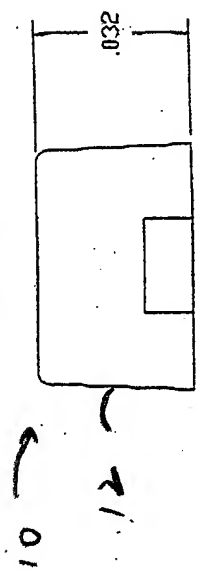


Figure 7D

Figure 7A, 7B, 7C, 7D

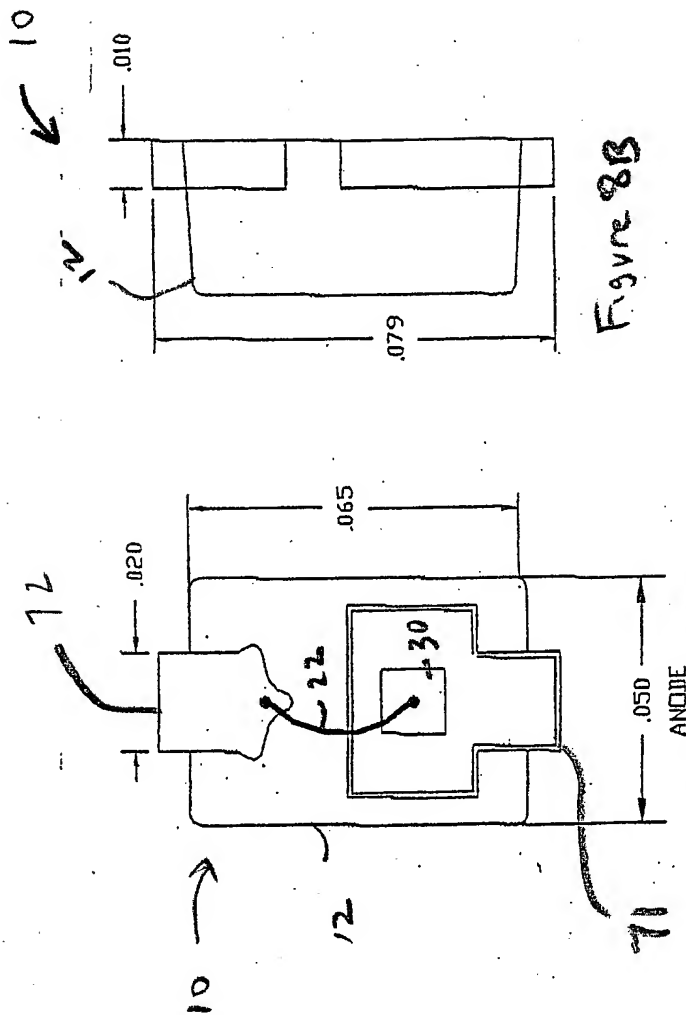


Figure 8A

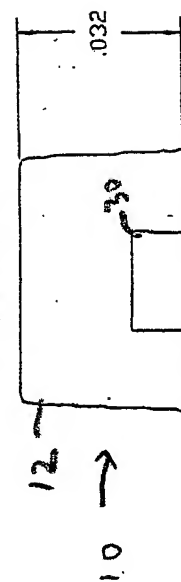


Figure 8C

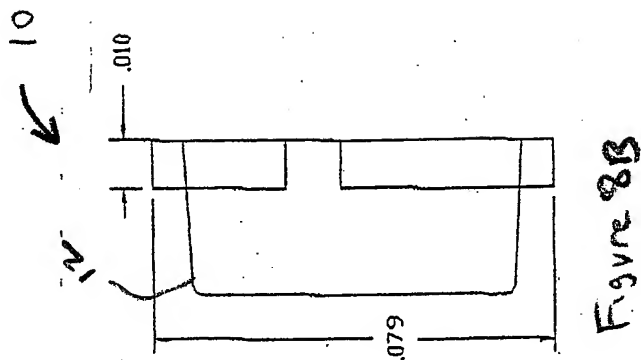


Figure 8B

Figure 8A, 8B, 8C

# GENERAL SPECIFICATIONS:

- 1 - All dimensions in mm.
- 2 - All package radii 0.1 max.
- 3 - All package release angles  $5^\circ \pm 1^\circ$
- 4 - Package roughness 0.4  $\mu\text{m}$  Ro EDM max.
- 5 - Package off-center  $\pm 0.05$
- 6 - Dimensions excludes any plating
- 7 - \* = Remaining flash
- 8 - Plating: Nickel/Gold total 0.13 ~ 0.75 microns

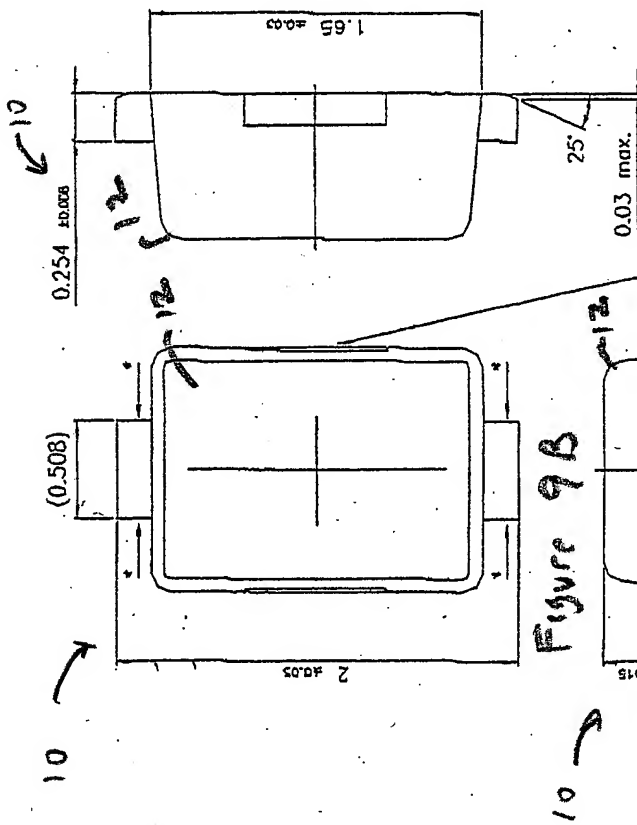


Figure 9B

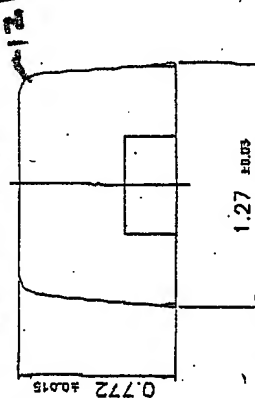


Figure 9C

Might be intrusion or extrusion

Figure 9A

Figure 9A, 9B, 9C